

Outstanding productivity and high-quality output

imageRUNNER ADVANCE
C7260i, C7270i, C7280i

you can

60-80 PPM MONO
/ 55-70 PPM COLOUR

21.3 CM TOUCH SCREEN

PAPER CAPACITY UP TO 6,900
OR 9,300 SHEETS

MEDIA UP TO 300 GSM,
SIZE UP TO SRA3

SUPERB PRINT QUALITY

PROFESSIONAL FINISHING

These devices keep pace with the toughest office schedules, delivering performance and quality with professional finishing. Powerful security and unbeatable environmental credentials combine for a future-proof investment.



Productivity and quality hand in hand

- Unrivalled user experience through a large 21.3 cm (8.4 inch) colour touch-screen
- Personalisation through user-defined one-touch buttons to simplify and automate common tasks
- A 300-sheet one-pass duplex scanner captures paper documents at speeds of up to 200 ipm
- Standard support for data formats such as Searchable PDF and Office Open XML (PowerPoint and Word) enables re-use and re-purpose of digital content
- True 1200 x 1200 dpi resolution, pQ toner and automatic colour adjustment ensure great image quality
- Optional Fiery-based ColorPASS-GX400 or imagePASS-A2 controllers enhance processing, job management, workflow automation and accurate colour reproduction
- Professional finishing options staple, saddle stitch, punch, trim, fold and insert for versatile document creation
- Support for mobile working.

Cost Control

- Scalability allows the device to adapt to your changing needs
- User activity tracking provides visibility of print behaviour
- Apply policies and restrict usage at function level by user
- Cost centre job accounting and rule-based routing for cost optimisation with uniFLOW
- Efficient device monitoring, reporting and diagnostics for proactive maintenance and maximum uptime.

Device and Information Security

- Smart user authentication enables controlled device access without impacting convenience
- Disable functions per user to prevent unauthorised usage
- Secure print and Mailbox ensure document confidentiality
- A variety of standard and optional security features protects device, network and documents
- Integrates with uniFLOW Data Loss Prevention solution providing auditing of prints, scans, copies and faxes.

 **ImageRUNNER**
ADVANCE

Canon


Integration

- Integrates seamlessly into your network and enterprise solution
- Collaborates with business applications and external systems in the Cloud such as Google Drive™
- Through the embedded MEAP platform the device integrates tightly with a range of powerful capture and document management solutions such as uniFLOW or eCopy
- Easily configure, manage and upgrade your device, whether individually, or as part of a larger fleet using Canon's device management tools.


Sustainability

- Class leading Typical Electricity Consumption (TEC*) ratings
- Consumes as little as 0.9 W in sleep mode
- Incorporates recycled materials and bio-plastics
- ENERGY STAR® qualified.

Configuration options for C7260i/7270i

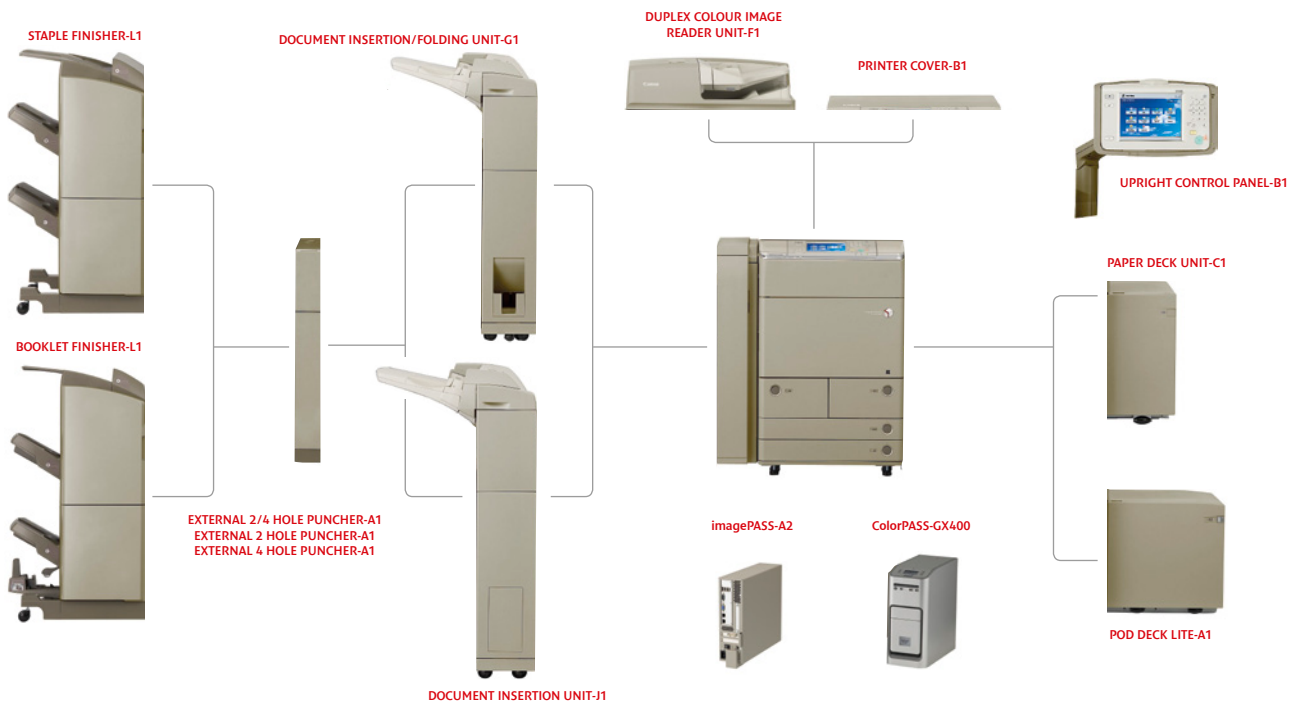

Configuration options for C7280i

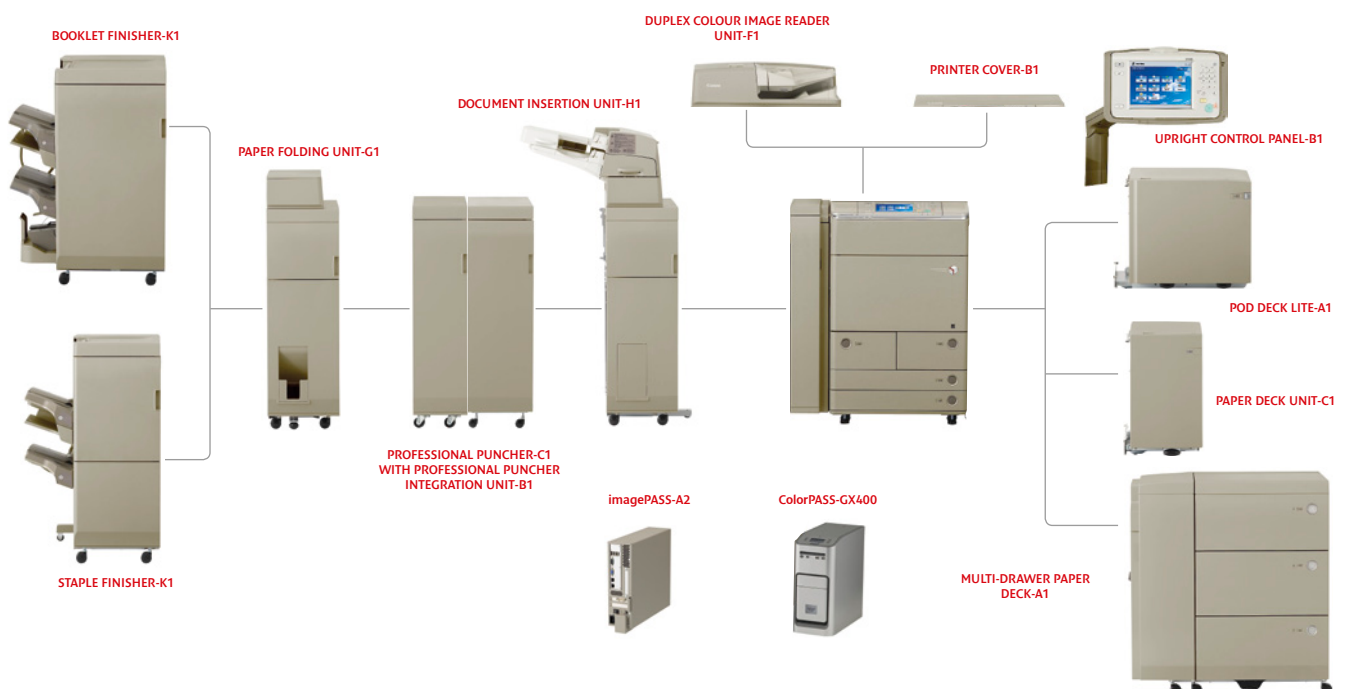

Canon

For full details of all options, please refer to the product specifications.

*Defined by ENERGY STAR (<http://www.eu-energystar.org>)

Specifications: imageRUNNER ADVANCE C7200 series

Paper Deck Unit 1	PAPER DECK UNIT-C1 for iR-ADV C7260i/7270i/7280i Paper Size: A4 Paper Weight: 52 to 220 gsm Paper Capacity: 3500 sheets (80 gsm) Dimensions (W x D x H): 323 mm x 583 mm x 570 mm Weight: Approx. 37 kg	Document Folding Unit	PAPER FOLDING UNIT-G1 for iR-ADV C7280i (requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1) Folding: Z-Fold: Paper Size: A3, A4R; Paper Weight: 52 to 105 gsm C-Fold: Paper Size: A4R; Paper Weight: 52 to 105 gsm Accordion Z-fold: Paper Size: A4R; Paper Weight: 52 to 105 gsm Double parallel: Paper Size: A4R; Paper Weight: 52 to 90 gsm Half fold: Paper Size: A4R; Paper Weight: 52 to 105 gsm Output Capacity: C-Fold and Accordion Z-fold: 40 sheets, Double parallel: 20 sheets Dimensions (W x D x H): 336 mm x 793 mm x 1190 mm Weight: Approx. 71 kg	System accessories	SUPER G3 2ND LINE FAX BOARD-AD1: Add this board to have a second fax line on your device. REMOTE FAX KIT-A1: Enables the device to connect as a client to, and send/receive fax through another imageRUNNER ADVANCE device on the network, which is fax enabled. WEB ACCESS SOFTWARE-H1: Gives you access to web sites and other online content, so you can download and print it without the need for a computer. SERIAL INTERFACE KIT-K1: (For Cost recovery solution) allows serial communication between 3rd party coin vending devices and Canon's iR-ADV range devices for cost recovery use. An embedded mode (MFP Charge Mode) is enabled in the devices by using Serial Interface Kit-K1. COPY CONTROL INTERFACE KIT-A1: (For cost recovery solution) allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's iR-ADV range for cost recovery use.
Paper Deck Unit 2	POD DECK LITE-A1 for iR-ADV C7260i/7270i/7280i Paper Size: A3, A4, A4R, SRA3, 13"x19" Paper Weight: 52 to 300 gsm Paper Capacity: 3500 sheets (80 gsm) Dimensions (W x D x H): 601 mm x 621 mm x 570 mm Weight: Approx. 50 kg	Professional Puncher	PROFESSIONAL PUNCHER-C1 for iR-ADV C7280i (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1, and PROFESSIONAL PUNCHER INTEGRATION UNIT-B1) Acceptable Punch Paper Weight: 75 to 216 gsm (Plain paper), Pio Click: 75 to 176 gsm Acceptable Punch Paper Size: A4 Punch Tools: Plastic Comb 21-Hole, Twin Loop 23-Hole (Round), Twin Loop 34-Hole (Round), Colour Coil 47-Hole, Velo Bind 12-Hole, Loose Leaf 4-Hole Round Punch, Loose Leaf 2-Hole Round Punch, Loose Leaf 4-Hole (SWE), Loose Leaf 5-Hole, Pio Click 34-Hole Dimensions (W x D x H): 305 mm x 792 mm x 1040 mm Weight: Approx. 80 kg	Device security accessories	HDD DATA ENCRYPTION AND MIRRORING KIT-C1: Hard disk drive accessory pack, providing encryption and mirroring of both temporary and permanent data. Encryption enables copied or scanned images to be encrypted BEFORE they are saved on the device's hard drive. The mirroring function copies all data in real time, providing a highly reliable back-up. 2.5INCH/16GB HDD-G1: Additional HDD for mirroring function. 2.5INCH/1TB HDD-H1: A replacement HDD to increase the storage space on the device. Please note: To use the HDD mirroring function, you need a second 1TB HDD. REMOVABLE HDD KIT-AC1: Allows the physical removal of the Hard Disk Drive when the device is unattended or not in use to protect confidential data and provide a greater level of security.
Paper Deck Unit 3	MULTI-DRAWER PAPER DECK-A1 for iR-ADV C7280i Paper Size: A3, A4, A4R, A5R, SRA3, 13"x19" Paper Weight: 52 to 300 gsm Paper Capacity: 2000 sheets x 3 drawers, total 6000 sheets (80 gsm) Dimensions (W x D x H): 950 mm x 797 mm x 1040 mm Weight: Approx. 150 kg	ADDITIONAL OPTIONS	PAPER DECK DOUBLE FEEDING DETECTION KIT-A1: Enables detection of double feed from the multi-drawer paper deck to enhance the accuracy of paper feeding. UTILITY TRAY-A2: Provides an additional work surface extension for placement of keyboard. KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Document security accessories	DOCUMENT SCAN LOCK KIT-B1: Increases document security levels by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing. SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
Puncher Unit/s	EXTERNAL 2 HOLE PUNCH UNIT-A1, EXTERNAL 2/4 HOLE PUNCH UNIT-A1, EXTERNAL 4 HOLE PUNCH UNIT-A1 for iR-ADV C7260i/7270i (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1) Punch Hole type: EXTERNAL 2 HOLE PUNCH UNIT-A1: 2 holes EXTERNAL 2/4 HOLE PUNCH UNIT-A1: 2 holes (FRN) and 4 holes (FRN) EXTERNAL 4 HOLE PUNCH UNIT-A1: 4 holes (SWE) Acceptable Punch Paper Weight: 52 to 256 gsm Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (*EXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4	Hardware accessories	BARCODE PRINTING KIT-D1: Enables barcode printing via jet caps technology. IW DESKTOP: Powerful print publishing software which easily combines documents from different sources, applies finishing to create professional looking documents and seamlessly links to the printer. Includes PDF creation, annotation and compression capabilities for digital workflows such as proofing and authorisation. X-RITE PRO CON LITE: Contains a spectrophotometer for colour measurement, monitor and printer quality control, and supports ICC profile creation for monitors and CMYK printers. REMOVABLE HDD KIT-B1 (for colorPASS-GX400): Provides the user with the ability to lock the server hard disk drive into the system for normal operation and the ability to remove the drive to a secure location after powering down the server. STAND AND GUI KIT FOR SERVER: Includes monitor, keyboard, mouse and stand for ColorPASS-GX400. PRODUCTIVITY PACKAGE (for imagePASS-A2): Adds features for advanced job management and productivity in addition to some graphic arts premium edition features. Components include: Hot folders, Postflight, ImageViewer. GRAPHIC ARTS PACKAGE, PREMIUM EDITION, V.2.2 (for colorPASS-GX400): Provides powerful proofing capabilities and optimised workflow with output simulations for the graphic arts environment. SEQUENCE IMPOSE: A document imposition solution which is available through Command WorkStation on the FIERY-based controller. SEQUENCE COMPOSE: A document assembly and composition solution for the FIERY-based controller with WYSIWYG interface, which is available through Command WorkStation. SEQUENCE SUITE: A package including both SeeSequence Impose and SeeSequence Compose	Document security accessories	DOCUMENT SCAN LOCK KIT-B1: Increases document security levels by embedding hidden track and lock code within copied or printed documents to restrict unauthorised copying, sending, and faxing. SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
Puncher Unit/s	Punch Unit-BG1/BH1 for iR-ADV C7280i (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1) Punch Hole type: Punch Unit-BG1: 2 holes and 4 holes (FRN) selectable Punch Unit-BH1: 4 holes (SWE) Acceptable Punch Paper Weight: 52 to 256 gsm Acceptable Punch Paper Size: 2 holes A3, A4, A4R* (*EXT 2H PUNCH UNIT-A1 only), 4 holes A3, A4	Barcode printing accessories	KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Document security accessories	SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
Document Insertion/Folding Unit	DOCUMENT INSERTION/FOLDING UNIT-G1 for iR-ADV C7260i/7270i (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1) Folding: Z-fold: A4R, A3; Paper Weight: 60 to 105 gsm C-fold: A4R; Paper Weight: 60 to 105 gsm Output Capacity: C-fold 40 sheets Number of insertion trays: 1 tray Insertion Paper size: A3, A4, A4R, SRA3, 13"x19" Insertion Paper Weight: 60 to 256 gsm Paper Capacity: 100 sheets x 1 tray (80 gsm) Dimensions (W x D x H): 247 mm x 679 mm x 1242 mm Weight: Approx. 76 kg	Print controller accessories	KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Document security accessories	SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
Document Insertion Unit	DOCUMENT INSERTION UNIT-J1 for iR-ADV C7260i/7270i (Requires either the BOOKLET FINISHER-L1 or STAPLE FINISHER-L1) Number of trays: 1 tray Paper size: A3, A4, A4R, SRA3, 13"x19" Paper Weight: 60 to 256 gsm Paper Capacity: 100 sheets x 1 tray (80 gsm) Dimensions (W x D x H): 247 mm x 679 mm x 1242 mm Weight: Approx. 40 kg	Document Publishing	KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Document security accessories	SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
Document Insertion Unit	DOCUMENT INSERTION UNIT-H1 for iR-ADV C7280i (Requires either the BOOKLET FINISHER-K1 or STAPLE FINISHER-K1) Number of trays: 2 trays Paper size: A3, A4, A4R, SRA3, 13"x19", Free size: 182 mm x 182 mm to 330.2 mm x 487.7 mm; Paper Weight: 52 to 300 gsm Paper Capacity: 200 sheets x 2 trays (80 gsm) Dimensions (W x D x H): 336 mm x 793 mm x 1407 mm Weight: Approx. 61 kg	Efi-Fiery based controller options	KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Document security accessories	SECURE WATERMARK-B1: Deters duplication of sensitive documents by embedding hidden watermarks that become visible when copied. ENCRYPTED PRINTING SOFTWARE-D1: Encrypts the print job in transit to the device and requires a password at the printer before sensitive documents can be printed.
		Efi-Fiery based controller options 2	KEY SWITCH UNIT-B1: Allows administrators to enable and/or disable system functions that are accessible to all users, with a physical key. MICARD PLUS PROXIMITY CARD READER: A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indata and MiFare etc.).	Other options	VOICE OPERATION KIT-C2: Enables the user to set various functions on the device using verbal instructions and audible feedback. STAMP INK CARTRIDGE-C1 STAPLE CARTRIDGE-D3: Saddle staple cartridge for BOOKLET FINISHER-L1 STAPLE-J1: Plain staple cartridge for BOOKLET FINISHER-L1 and STAPLE FINISHER-L1 STAPLE-N1: Plain staple cartridge for BOOKLET FINISHER-K1 and STAPLE FINISHER-L1 STAPLE-P1: Saddle staple cartridge for BOOKLET FINISHER-K1
				Standard disclaimers	All specifications subject to change without notice.
				Footnotes	1. Based on ITU-T Standard Chart No. 1 2. 1 watt sleep mode may not be possible in all circumstances. Certain network configurations and options may prevent the device from entering deep sleep mode. Please refer to the user guide for more information 3. Typical Electricity Consumption (TEC) rating represents the typical electricity consumed by a product during 1 week, measured in kilowatt-hours (kWh). The test methodology is defined by ENERGY STAR (http://www.eu-energystar.org). 4. Declared noise emission in accordance with ISO 7779 5. Based on 6% coverage



Canon Inc.
canon.com

Canon Europe
canon-europe.com

English Edition
© Canon Europa N.V., 2012